


WinchMaster

SPECIALIST WINCH SOLUTIONS

COMPLIANT WITH EN 14492 REGULATIONS

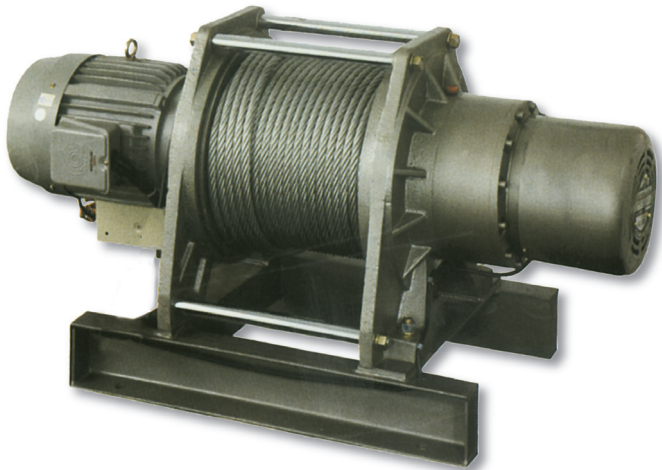

NEW EUROPEAN STANDARDS & WINCHMASTER

New Harmonised European Standards: EN14492-1 for power driven winches, EN14492-2 for power driven hoists provide the means for conformity to essential Health and Safety requirements of the EC Machinery Directive.

Conformity to these standards is the joint responsibility of the supplier, the installer and the company operating the product.



Winchmaster products are fully compliant and carry a CE mark. A Declaration of Conformity is also supplied with each winch or hoist.

Selecting the correct winch or hoist for the application is very important not only from the health and safety aspect, but also to maximise product life and value for money.

Our aim at Winchmaster is to ensure the correct machine is supplied to suit the application and we welcome the opportunity of discussing the proposed application and offer advice. It will help us considerably if information regarding the maximum and average loads to be lifted or pulled - and approximate frequency of use can be provided.

For hoisting applications the minimum breaking force (MBF**) of the wire rope must be 5 x the lifting capacity of the hoist. The ratio of wire rope diameter to mean drum diameter* is usually at least 15:1. This will vary according to the application, the average operating time per day and the average and maximum weights being lifted.

For pulling applications (for example, in factories) as a general rule requires a wire rope with a MBF** relative to winch capacity of 3:1 and a rope to mean drum ratio* of 12:1.

For recovery vehicles the permissible standard of wire rope MBF** to winch rating can be a minimum 2:1 and the ratio of wire rope to mean drum ratio* only 10:1. This minimum standard is permitted because the running time is so short and the winch rarely sees maximum load.

Wire rope capacities the maximum amount of wire rope on the drum must leave a freeboard to the top of the drum flange of 1.5 x wire rope diameter to prevent the wire rope coming off the drum.

Winches and hoists with capacities over 1000kg must be load limited.

* Mean drum diameter = the drum diameter plus the diameter of the wire rope.

** MBF = the Minimum Breaking Force of the wire rope.

CWG LIFTING WINCHES

900-1360kg

CWG30375 (900kg)

CWG30565 (1100 - 1360kg)

Rated on 3rd layer of rope

415v x 3ph AC

FEATURES INCLUDE

- **Electromagnetic, spring applied, failsafe brake**
Provides instant, safe braking
- **Bi-rotational**
CWG winches can be installed with wire rope coming off the top or bottom of the drum
- **Enclosed drum flange**
Prevents rope becoming trapped between drum and support casing
- **Low voltage control supplied as standard**
24v AC, pre-wired to the winch with 2 button control and emergency stop
- **Cast steel foot mounting**
For easy installation
- **Complete with wire rope**
Galvanised for longer life
- **Quiet running**
Conforms to noise pollution regulations
- **360° weighted safety hook**
Swivel type with safety catch
- **Motor to IP54 as standard**
(other options available on request)
- **2 metre power lead**
Pre-wired to the winch with commercial type plug

ADDITIONAL EQUIPMENT FROM WINCHMASTER

- **Radio remote control**
- **Weather proof enclosure**

TO ESTABLISH WHICH WINCH OR HOIST IS SUITABLE FOR YOUR PROJECT, CALL WINCHMASTER NOW ON 01482 223663

WINCHMASTER Unit 6 South Orbital Trading Park Hedon Road Hull HU9 1NJ

T: +44 (0)1482 223663 F: +44 (0)1482 218285


CALL SALES ON 01482 223663

E: sales@winchmaster.co.uk W: www.winchmaster.co.uk

A DIVISION OF
BHW
GROUP
LIMITED



CERT. No. 1769

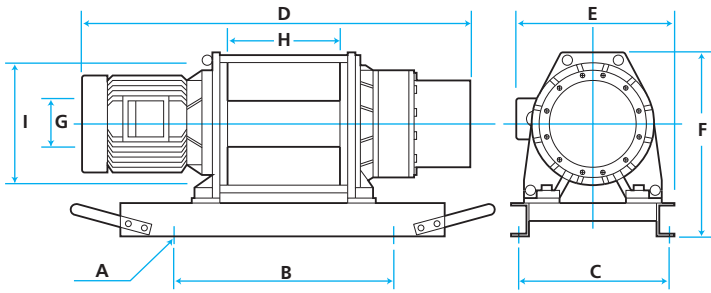

WINCH DIMENSIONS mm									
MODEL	A	B	C	D	E	F	G	H	I
CWG-30375	4 off Ø 19	500	520	960	400	445	124	230	275
CWG-30565	4 off Ø 19	620	520	1100	470	520	140	312	320

LINE PULL AND LINE SPEED PERFORMANCES - WINCHES ARE LOAD RATED ON THIRD LAYER

CWG30375a 415v x 3ph

		LAYERS				
		1	2	3	4	5
Maximum Rated Line Pull by Layer	kN	10.8	9.8	8.8	7.8	6.9
	kgf	1100	1000	900	800	700
CWG30375a Rope Capacity Cumulative by Layer (9mm Dia. Wire Rope)	m	10.3	21.6	34	46.4	60
Line Speed*	m/min	12.6	14.2	15.8	17.6	19.6

* Based on recommended 9mm diameter wire rope, 1960N/mm² grade, 7 x 18 wire core construction

CWG30375b 415v x 3ph

		LAYERS				
		1	2	3	4	5
Maximum Rated Line Pull by Layer	kN	10.8	9.8	8.8	7.8	6.9
	kgf	1100	1000	900	800	700
CWG30375b Rope Capacity Cumulative by Layer (9mm Dia. Wire Rope)	m	10.3	21.6	34	46.4	60
Line Speed*	m/min	8.4	9.5	10.6	11.7	12.8

* Based on recommended 9mm diameter wire rope, 1960N/mm² grade, 7 x 18 wire core construction

CWG30565a 415v x 3ph

		LAYERS				
		1	2	3	4	5
Maximum Rated Line Pull by Layer	kN	16.2	14.7	13.3	12.2	11
	kgf	1650	1500	1360	1240	1120
CWG30365a Rope Capacity Cumulative by Layer (9mm Dia. Wire Rope)	m	14.9	30.9	48	66	85
Line Speed*	m/min	15.7	17.6	19.6	21.5	23.5

* Based on recommended 11mm diameter wire rope, 1960N/mm² grade, 7 x 18 wire core construction

CWG30565b 415v x 3ph

		LAYERS				
		1	2	3	4	5
Maximum Rated Line Pull by Layer	kN	13.9	12.3	11	9.9	9.1
	kgf	1420	1252	1120	1012	928
CWG30365b Rope Capacity Cumulative by Layer (9mm Dia. Wire Rope)	m	14	21.1	45	62.6	80
Line Speed*	m/min	8.9	10.1	11.3	12.4	13.6

* Based on recommended 10mm diameter wire rope, 1960N/mm² grade, 7 x 18 wire core construction

CWG SPECIFICATIONS

30375a

30375b

30365a

30565b

Voltage:	415v 3ph				
Lifting capacity	900kg	1360kg	1120kg		
Weight:	Winch only	185kg	250kg		
	Total kit average	225kg	285kg		
Wire rope ϕ x max. length:	9mm x 34m	11mm x 48m	10mm x 46m		
Construction:	18 x 7 wire core for maximum flexibility. Minimum factor of safety 5:1				
Motor type:	Induction motor				
Outputs	Kilowatts:	3kw	2.2kw	5.5kw	3kw
	Amperes:	6.6amp	5.4amp	11amp	6.8amp
Braking:	Electromagnetic spring applied failsafe				
Drum ϕ x length / (ϕ flange):	ϕ 127mm x 230mm / (ϕ 275mm)	ϕ 165 x 312 (ϕ 320)	ϕ 140 x 312 (ϕ 320)		
Rope ϕ to drum ϕ ratio:	15:1	16:1	15:1		

NOTES

These winches must not be used for the movement of personnel and 7 wraps of wire rope must be maintained on the drum.

Data shown is approximate and intended as a guide only.

WARRANTY

Each new winch is guaranteed against defects in workmanship and material defects for a period of twelve months from date of purchase.

WIRE ROPES ARE NOT INCLUDED UNDER WARRANTY.

WINCHMASTER Unit 6 South Orbital Trading Park Hedon Road Hull HU9 1NJ

T: +44 (0)1482 223663 F: +44 (0)1482 218285



CALL SALES ON 01482 223663
E: sales@winchmaster.co.uk W: www.winchmaster.co.uk

WINCHMASTER IS A DIVISION OF THE BHW GROUP LIMITED REGISTERED IN ENGLAND No. 1342461

WM20/20.02.09



CERT. No. 1769